



SERVICE 		4
		X 87.123-26

MODEL 39 R


FUEL TANK

In order to avoid that radiation heat from the clutch warms up the fuel tank, the tank design is changed. The change means that a larger air gap is received between the fuel tank and the clutch.

A recess is introduced in the tank, at the same time. This is made in order to receive an easier assembly/disassembly of the cable unit.

The Ref. No. 502 11 51-01 fuel tank, remains unchanged.

The changed fuel tank is marked with "changing littera" F. It is fully interchangeable with older design.

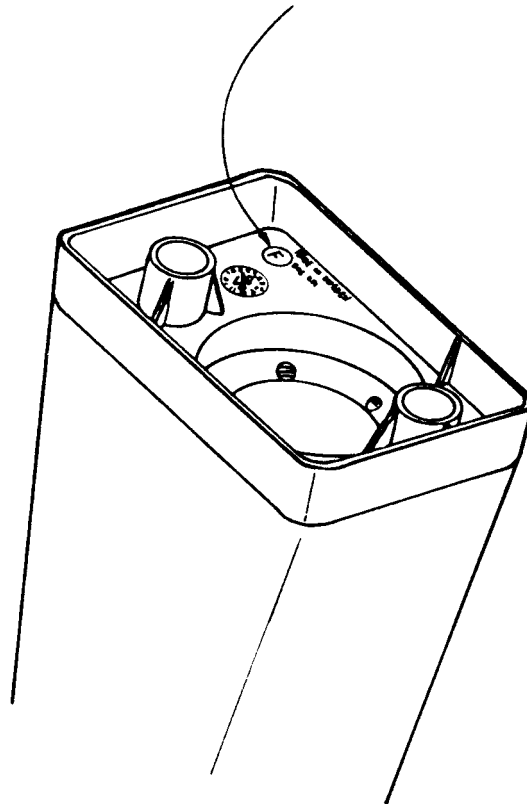

The change is introduced from serial No 7471100.