



Service Advisory

TRACTOR

W-159

Models Affected: OEM-190-032 and 190-032-101
 Serial Number Range Affected: N/A
 Date: **October 2, 2008**
 Subject: **42" 2-Stage Snow Thrower Attachment Heat Shield.**

ACTION REQUIRED: This advisory is **INFORMATIONAL ONLY**

PURPOSE: This informational advisory addresses the 42" 2-stage snow thrower attachment's heat shield usage and rider model configuration.

DISCUSSION:

For riders that have the raised side discharge muffler, see Figure 1, the snow thrower's heat shield, see Figure 2, is not required. The heat shield should be removed before attaching the snow thrower attachment to the rider.

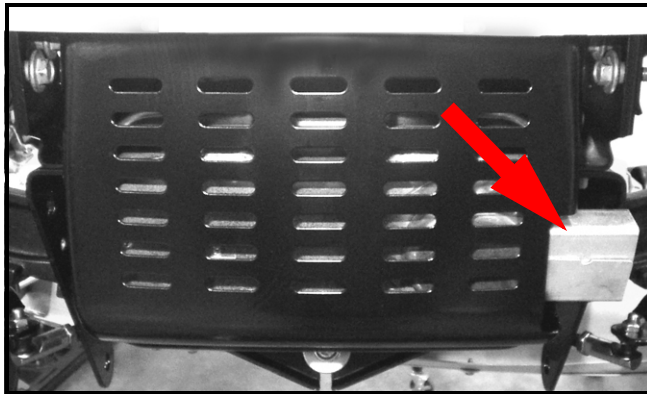


FIGURE 1

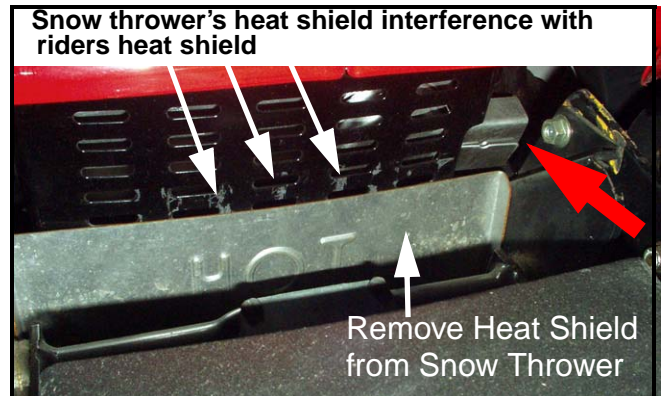


FIGURE 2

For riders that have the lower forward discharge muffler, see Figure 3, the snow thrower's heat shield must remain on the snow thrower attachment to protect the gear box.

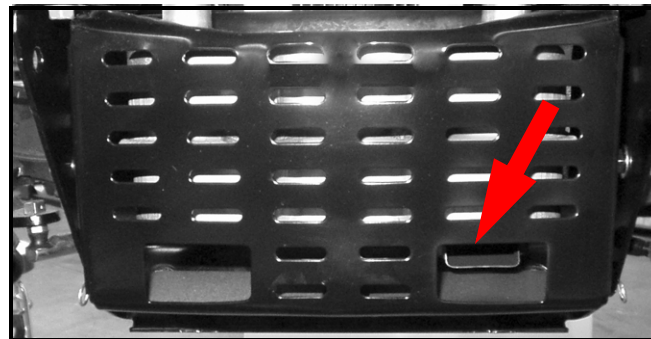


FIGURE 3

This Advisory is being released for informational purposes only

SERVICE MANAGER	PARTS MANAGER	SALES MANAGER	SERVICE TECH.	SERVICE TECH.

Circulate and Initial